


VOLVO PENTA AQUAMATIC

5.7/SX

Up to 239 kW (320 hp)

Genuine V-8

A genuine gasoline V-8 for performance motorboats. With 5.7-liter displacement and eight cylinders, this engine delivers loads of torque and power across the entire speed range. Available either with carburetors (GL) or an advanced fuel-injection system (Gi and GXi) the engine is a perfect match for the SX single-propeller drive. The drive can easily be adapted for right (standard) or left-handed propellers. Power steering is fitted as standard for maximum driving comfort.

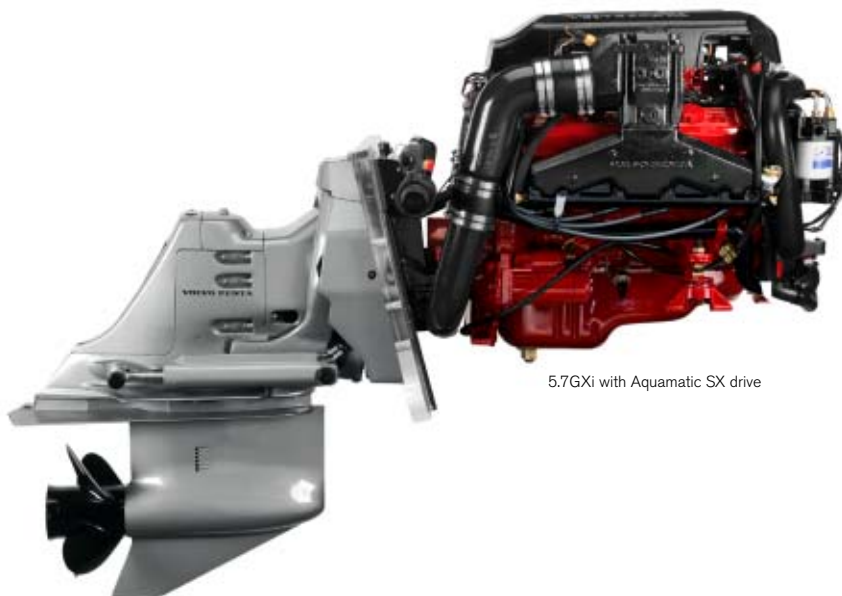

5.7GX with Aquamatic SX drive

Engine

5.7 liter gasoline engine in a V-8 configuration featuring: seawater cooling with cast iron cylinder block, cylinder heads and exhaust manifolds, which are specially developed for the marine industry. The exhaust manifolds and risers are EDP treated for increased durability. In addition, the seawater pump is located on the front of the engine for easy accessibility.

Fuel injection (Gi and GXi)

The Multi Port Fuel Injection system is monitored by an Electronic Control Module (ECM) and gives the following advantages: more responsive and smoother acceleration, excellent turnkey starts in all weather conditions, smooth reliable idling, reduced fuel consumption, and improved control of emissions.

Additional features built into the system include: engine knock control for compensation of less than perfect gasoline, overspeed protection, rpm reduction of the engine for low oil pressure, high engine temperature, and low voltage, platinum tipped spark plugs for longer life and trouble free starts, altitude compensation for air density, and self-diagnostic capabilities. Also, there are two fuel pumps for low and high pressure respectively.

EVC/MC – Plug and go (option on Gi and GXi)

EVC Electronic Vessel Control is the latest development in instrumentation for marine engines. It offers a higher level of integration with your boat: speed, tank level, depth and surface water temp as well as

trip computer integrated into a uniform instrumentation are some of the new thrilling options offered by EVC.

EVC makes boating easier offering adjustable trim limits. EVC is scalable from a classic dashboard up to advanced driver information systems. The system is built on the latest automotive technology with waterproof connectors, so it's just plug and go.

Aquamatic sterndrive

The SX single propeller drive is of the most modern design featuring exhaust through the propeller hub for quiet and efficient operation, a cone clutch for easy and smooth shifting, pattern-matched spiral bevel gears for optimum strength and minimum gear whine, and a break-away shaft coupling to prevent costly drivetrain repairs.

The hydrodynamic design of the lower drive housing ensures excellent course stability both at high speed and when maneuvering at low speeds and in reverse. The drive is equipped with easily maneuvered hydraulic power trim for obtaining the best running position at different sea and load conditions.

For maximum corrosion protection the drive has gone through a 23 step paint process and comes equipped with sacrificial anodes both on the drive and transom shield.

Either right- (standard) or left-handed propellers can be used. A choice of stainless steel and aluminum propellers are available for different applications.

The 5.7 features standard power steering for maximum driving comfort.

Electrical system

The electrical system features a 12 V corrosion-protected marine electrical system which meets the U.S. Coast Guard requirements. The engine is wired for easy plug-in connection to the instrument panel. The engine electrical system and the electric hydraulic power trim is protected by a 50 A circuit breaker and comes equipped with a 75 A alternator. Full instrumentation including trim gauge and wiring harness (option on certain markets).

Technical description:

Engine and block

- Cylinder block and cylinder heads made of cast iron for good corrosion resistance
- Pistons with two compression rings and one oil scraper ring
- Five-bearing crankshaft
- Valve train consisting of single camshaft, hydraulic valve lifters, push rods and two overhead valves per cylinder
- Color-coded service points

Engine mounting

- Two adjustable rubber mounts, one on each side of the engine, and two between transom shield assembly and engine

Lubrication system

- Pressure lubrication system with full-flow oil filter of spin-on type
- Remote oil filter (Gi and GXi)

Fuel system

- Multi Port Fuel Injection system – MPI (Gi and GXi)
- Fuel filter with water separator
- Two electric fuel feed pumps (Gi and GXi)
- Flexible fuel lines

**VOLVO
PENTA**

5.7/SX

Inlet and exhaust system

- Marine intake manifold developed for Multi Port Fuel Injection (Gi and GXi)
- Flame arrester
- Closed crankcase ventilation
- Seawater-cooled exhaust manifolds and risers made of cast iron
- Complete exhaust line with pipe and bellows for exhaust outlet through the drive

Cooling system

- Thermostatically controlled seawater cooling. 5.7Gi and 5.7GXi can be ordered with factory-mounted freshwater cooling.
- Crankmounted seawater pump
- Serpentine belt with spring tensioner (Gi and GXi)
- Electrocoated exhaust risers and manifolds
- Flush fitting – hose connection to flush cooling system with freshwater

Electrical system

- 12 V corrosion-protected electrical system
- ECM unit ensures constant optimum performance with diagnostic capability (Gi and GXi)
- Charging regulator with battery sensor for voltage drop compensation
- 75 A alternator with internal transistorized voltage regulator and internal fan

- Breakerless electronic ignition system
- Platinum tipped spark plugs
- One 50 A resettable circuit breaker for the trim system
- One 20 A fuse for protection of the fuel feed pumps and one 15 A fuse for protection of the fuel injection system (Gi and GXi)
- Starter motor power 1.0 kW
- Audio alarm kit – engine oil pressure and temperature as well as exhaust overheat. 5.7Gi and GXi also have a low voltage audio alarm. Can be mounted at helm.

Instruments

- (option on certain markets)
- Complete instrument panel including: Rev counter, engine temperature gauge, oil pressure gauge, voltmeter, key switch, two fuses, instrument light switch
- Wiring harness from engine to instrument panel
- Maneuver switch for power trim
- Wiring harness from trim pump to maneuver switch for power trim and trim gauge
- See also EVC product bulletin for details

Drive

- Single propeller drive which can be run with both right- and left-hand propellers
- Cone clutch

- Coolant water intake for the engine located at the lower part of the drive
- Pattern-matched spiral bevel gears
- Through-hub exhaust
- Overload protection sleeve (break-away coupling)
- The drive can be tilted 55°
- The drive can be turned 28° in each direction
- Built-in kick-up function to reduce possible damage, in the event the drive strikes an underwater object
- Belt-driven power steering pump
- Oil cooler for power steering
- Active corrosion protection as accessory (standard on 5.7GXi)
- Shift interrupter (5.7Gi and GXi)

Power Trim

- Electrically operated hydraulic system with trim gauge for best driving comfort

Accessories

An extensive range of accessories for:

- Fuel system
- Control system
- Instruments
- Comfort & Safety
- Maintenance
- Cooling system
- Steering system
- Electric system
- Propeller & Drive

For detailed information, please see Accessory catalogs.

Technical Data

	5.7GXi	5.7Gi ¹⁾	5.7GL
Engine designation.....	5.7GXi	5.7Gi ¹⁾	5.7GL
Propeller shaft power kW (hp).....	239 (320)	209 (280)	194 (260)
Max. engine speed, rpm.....	5000	5000	4800
Displacement, l (in ³).....	5.7 (350)	5.7 (350)	5.7 (350)
Number of cylinders.....	V-8	V-8	V-8
Fuel system.....	MPI	MPI	2 BBL
Bore/stroke, mm.....	101.6/88.4	101.6/88.4	101.6/88.4
in.....	(4.00/3.48)	(4.00/3.48)	(4.00/3.48)
Compression ratio.....	9.4:1	9.4:1	9.4:1
Volvo Penta Aquamatic drive.....	SX	SX	SX
Ratio.....	1.6:1, 1.51:1 or 1.43:1	1.6:1, 1.51:1 or 1.43:1	1.6:1, 1.51:1 or 1.43:1
Dry weight engine, transom shield and drive, kg (lb).....	468 (1031)	468 (1031)	446 (984)
Dimensions (not for installation):			
Engine length			
inside transom, mm (in.).....	937 (36.9)	937 (36.9)	925 (36.4)
Engine width, mm (in.).....	718 (28.2)	718 (28.2)	718 (28.2)
Height above crankshaft, mm (in.).....	549 (21.6)	549 (21.6)	552 (21.7)
Height below crankshaft, mm (in.).....	251 (9.9)	251 (9.9)	251 (9.9)

¹⁾ SAV approved. Please contact
Volvo Penta Central Europe GmbH
Niederlassung Schweiz
CH-3250 Lyss, Switzerland
for certificate and label.

Propshaft power according to ISO 8665
Duty rating: R5 (Pleasure Duty)
IMEC Standard
The engine is certified according to CARB.

Contact your local Volvo Penta dealer for further information.

Not all models, standard equipment and accessories are available in all countries. All specifications are subject to change without notice.

The engine illustrated may not be entirely identical to production standard engines.

VOLVO PENTA

AB Volvo Penta
SE-405 08 Göteborg, Sweden
www.volvopenta.com